



## “Red Head” Stills - Micro Series

### SOLVENT RECOVERY STILL

“Red Head” Micro-Stills are an ideal solution for users with low to medium volume requirements. The Micro converts hazardous waste into 99.5% pure reusable solvent. Micro Solvent Recovery Systems reduce waste and increase profits.



**ECONOMICAL** - The Micro Product Line allows for a reduction in disposal and new solvent costs by converting hazardous waste into reusable solvent. User-friendly controls and minimal operator attention effectively minimize labor costs associated with operation.

**EFFICIENT** - The current Micro Product Line offers distillation ranges of 100° to 550°F. A vacuum pump enables you to distill solvents with boiling points higher than 400°F. The Micro is heated by a convection system; evaporating the waste solvent quickly and uniformly.

**PURE RECOVERY** - With the Micro, you control the “quality” of your reclaimed solvent. When you contract with an outside solvent reclaimer, your solvent might be mixed with other solvents and returned to you in a “blend” of questionable quality.





#### KEY FEATURES

- Class 1, Division 1, Group D electrical construction (explosion-proof)
- Simple operation
- Completely self-controlled during operation
- Bag type vessel liners are standard



# “Red Head” Stills - Micro Series

Professional solvent recovery equipment for small solvent users.

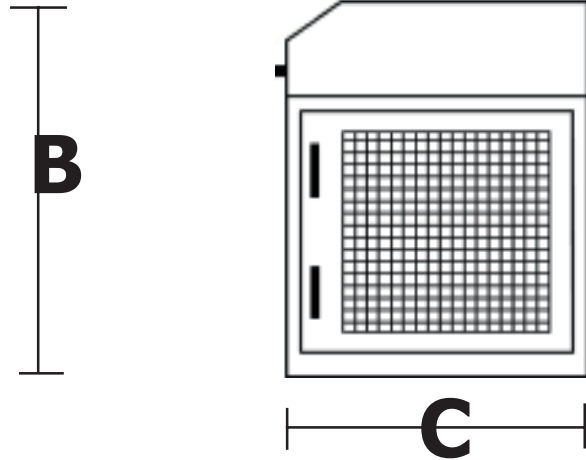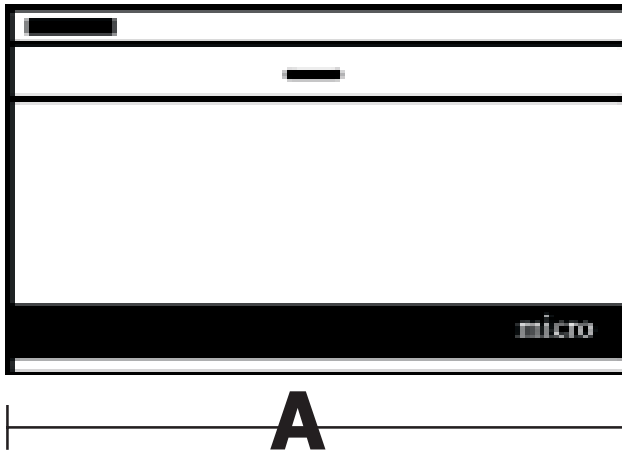

MODEL	DIMENSIONS (A x B x C)	HEATER WATTAGE	VESSEL VOLUME	UTILITIES	ELECTRICAL	VACUUM	RECOVERY RATE
<b>MICRO 15</b>	43 x 38 x 30	6,000	15 GAL	WATER *	220V, 30A, 1PH	OPTIONAL	1 - 8 GAL / HR
<b>MICRO 30</b>	51 x 41 x 33	14,000	30 GAL	WATER * & AIR	460V, 60A, 3PH (220V, 60A, 3PH optional)	STANDARD	6 - 18 GAL / HR

**MICRO 15** - Features a vessel capacity of 15 gallons and an output of up to 8 GPH. It operates as a batch processor for quantities of 15 gallons at a time.

**MICRO 30** - Has a vessel capacity of 30 gallons and an output of up to 18 GPH, depending on material processed. The auto-fill setting allows for continuous operation; featuring automatic “shut-off” when the supply of dirty solvent is depleted.

\* For Cooling: 2-4 GPM depending on material being processed.

rev.031004



## CB Mills - Chicago Boiler

1300 Northwestern Ave.

Gurnee, IL. 60031

Phone: 847-662-4000 sales@cbmills.com

Fax: 847-662-4003 www.cbmills.com

### WE CAN CUSTOM DESIGN YOUR SYSTEM

*Sometimes stock systems do not fit your needs, perhaps you need an extra gauge here or thermometer there. Whatever the case, CB Mills - Chicago Boiler will customize our systems to best fit your needs. Contact us for information about our complete capabilities or to schedule a demonstration.*